



CETA[®] PC Drippers

A take apart dripper with performance above the rest...



CETA[®] PC Dripper



A take apart Pressure Compensating dripper incorporating a turbulent flow path and diaphragm for uniform flow rates over a wide range of operating pressures.

Features

- Low manufacturing coefficient of variation (Cv) provides high performance (conforms to ISO 9261).
- Three colour coded and stamped flow rates - 2 lph, 4 lph and 8 lph.
- Large clog resistant turbulent flow path.
- The CETA[®] dripper is able to be taken apart for inspection and cleaning.
- Insect Baffle to deter insect entry.
- Constructed of high quality UV and chemical resistant materials

Applications

Vineyards, Orchards, Row Crops and Landscape.

Performance Chart

Pressure (kPa)	Flow (lph)		
	2 lph	4 lph	8 lph
50	1.9	3.3	6.2
100	2.0	3.8	7.9
150	2.2	4.2	7.9
200	2.3	4.4	8.1
250	2.3	4.4	8.1
300	2.3	4.4	8.0
MINIMUM FLOW PATH DIMENSION (mm)	0.7 x 0.6	0.8 x 0.8	1.2 x 0.9



CETA[®]
PC 2 lph
Barb 4 mm




CETA[®]
PC 4 lph
Barb 4 mm



CETA[®]
PC 8 lph
Barb 4 mm

Flow Rate

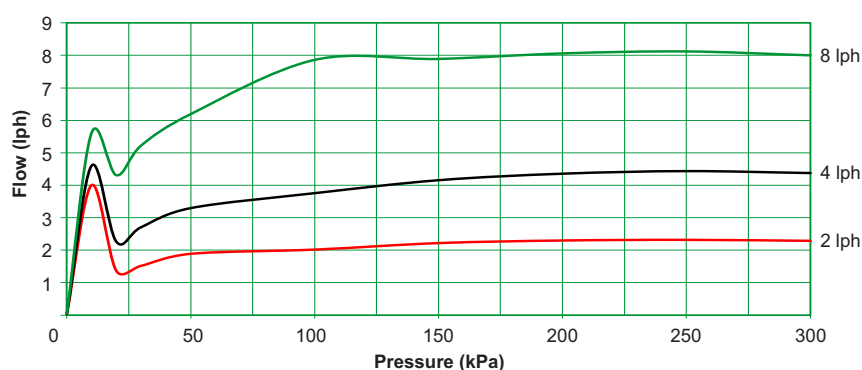

Ordering Information - CETA[®] PC Dripper

Flow	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
2 lph	30425	100	70	13.3
4 lph	30445	100	70	13.3
8 lph	30485	100	70	13.3

Specifications

DIMENSIONS ASSEMBLED		CETA [®] PC
HEIGHT		25 mm
WIDTH		20 mm
DEPTH		16 mm
WEIGHT (approx.)		1.7 g
UV STABILISED MATERIAL	BASE	polypropylene
	CAP	polypropylene
	DIAPHRAGM	silicon rubber
CONNECTION TYPE:		
	Inlet	BARB 4 mm
	Outlet	SPOUT 4 mm