

Potstream® Adjustable Flow



The Potstream® is a side mounted watering solution for pot plants and containers. The adjustable gentle stream pattern minimises soil erosion and the variable flow rate and pattern radius allow for use in various pot sizes.

Features

- Variable flow rate and pattern size suit pot diameters of 200 mm and upwards.
- Suit pot wall thickness up to 40 mm.
- Side mounted installation for the clean and tidy location of the supply tube.
- Low application rate and gentle stream pattern.
- Easily adjustable knob for varying spray patterns.

Applications

Potted plants, planter boxes and containers.

Performance Chart

Pressure (kPa)	Flow (lph)	Radius (mm)
50	0 - 16	0 - 235
100	0 - 22	0 - 245
150	0 - 27	0 - 260
200	0 - 31	0 - 280
250	0 - 36	0 - 300
300	0 - 39	0 - 330

Ordering Information - Potstream®

Description	Order Code	Pack Quantity	Packs per Carton	Carton (kg)
Potstream® Adjustable Flow	31455	25	20	6.3


Specifications

Dimensions Assembled	UV Stabilised Material	Colour	Base/Connection Type
HEIGHT 220 mm	STAKE polypropylene	STAKE Black	Inlet: BARB 4.5 mm
WIDTH 22 mm	KNOB HDPE	KNOB Black	
DEPTH 75 mm			
WEIGHT (approx) 11 g			

Typical System

KEY

- | | |
|------------------------|----------------------|
| A - Pressure Regulator | G - Potstream® |
| B - Nut & Tail | H - Tee |
| C - Filter | I - End Sleeve |
| D - Elbow | J - 13mm Supply Tube |
| E - Takeoff/Joiner | K - 4mm Micro Tube |
| F - Tidy Bow Elbow | |

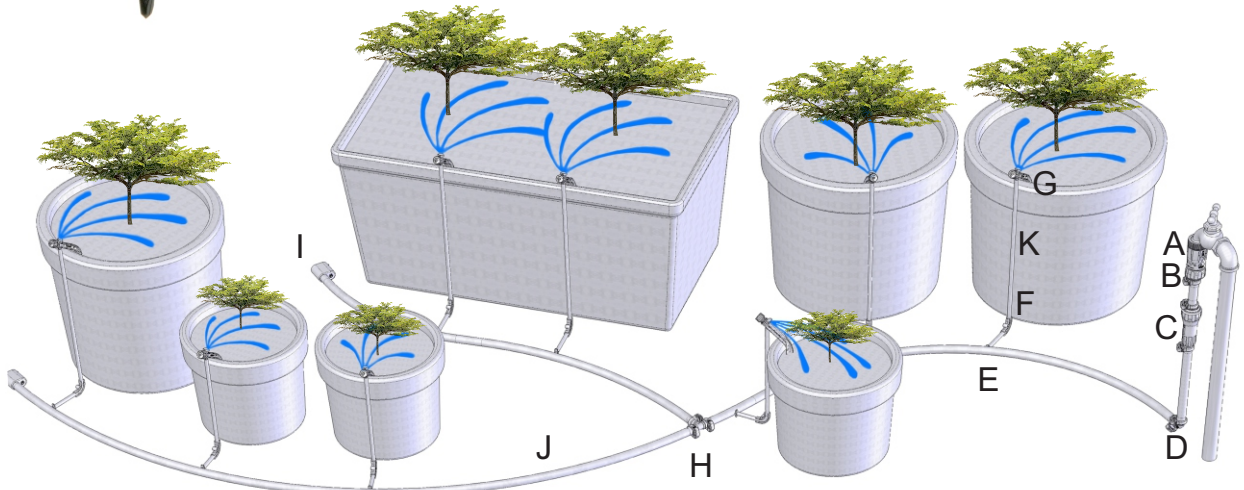

Potstream®

